



Proiettore per effetto parete in alluminio pressofuso, IP 65. Dotato di lenti biconvesse in vetro temprato e vetri piani. Consente l'impiego di lampade a ioduri metallici, fluorescenti e led consentendo un elevato risparmio energetico. Consente di personalizzare con la luce pareti e luoghi di passaggio. Vi è la possibilità di avere combinazioni di fasci stretti e larghi creando effetti luminosi accattivanti.

Die-cast aluminium wall-effect light, IP 65. Fitted with bi-convex lens in tempered glass and flat glasses. Can be used with metal halide, fluorescent and LEDs, with significant energy savings. Ideal for personalising both walls and pathways. You can combine narrow and wide beams, creating eye-catching light effects.





6532 302 x 168 x h 184
6533 302 x 168 x h 184
6534 302 x 168 x h 184



6531 302 x 168 x h 184



6539 302 x 168 x h 300
6537 302 x 168 x h 300
6538 302 x 168 x h 300



6535 302 x 168 x h 300

CERTIFICAZIONI
CERTIFICATION



GRADO DI PROTEZIONE
IP / IK RATING

IP 65 IK 06
IP 65 IK 06

CLASSE DI ISOLAMENTO
CLASSIFICATION

classe I
class I

CORPO
HOUSING

alluminio pressofuso EN AW 6060 alta resistenza all'ossidazione
die cast aluminium EN AW 6060 high resistance to oxidation

DIFFUSORE
DIFFUSER

vetro sodico calcico temprato 3 mm - lente biconvessa
3 mm soda-lime tempered glass -biconvex lens

VITERIA ESTERNA
EXTERNAL FIXINGS

inox A4
stainless steel A4

GUARNIZIONI
SEALING GASKET

silicone ricotto
silicone

ENTRATA CAVO
CABLE ENTRY

pressacavo in EPDM priva di alogeni Ø 8 /12 mm.
EPDM cable-gland free of halogens Ø 8 / 12 mm.

SECONDA ENTRATA CAVO
SECOND CABLE ENTRY

non disponibile
not available

LAMPADINA
LAMP

esclusa
not included

FINITURA
FINISH



verniciatura in polvere poliestere ad alta resistenza ai raggi UV ed alla corrosione
powder coated polyester high resistance to UV and oxidation



>>Smusso 70W HIT-DE

6532

1 fascio largo 1 flood


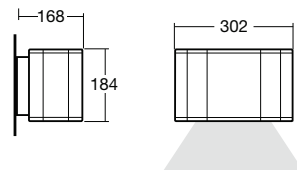


finiture disponibili finishes available

bianco grigio antracite grigio RAL9006 marrone ruggine
white anthracite grey RAL9006 grey rust brown

6533

2 fasci larghi 2 flood


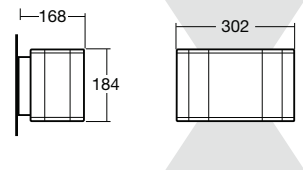


finiture disponibili finishes available

bianco grigio antracite grigio RAL9006 marrone ruggine
white anthracite grey RAL9006 grey rust brown

6531

1 fascio stretto 1 spot





finiture disponibili finishes available

bianco grigio antracite grigio RAL9006 marrone ruggine
white anthracite grey RAL9006 grey rust brown

6534

1 fascio largo + 1 stretto
1 flood + 1 spot

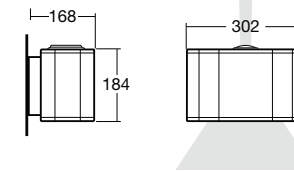

finiture disponibili finishes available

bianco grigio antracite grigio RAL9006 marrone ruggine
white anthracite grey RAL9006 grey rust brown

.82F.T

vetro trasparente clear diffuser
alimentatore elettronico electronic ballast



5W 5Led 230V

bianco white

medium 24°

225 lm 6000 K Cool White

8° orientabilità
adjustable

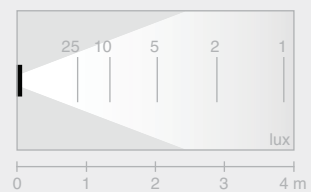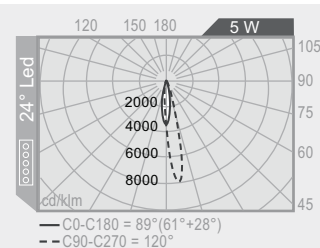

.B7F.T

vetro trasparente clear diffuser
alimentatore elettronico electronic ballast



5W 5Led 230V

bianco white

medium 24°

180 lm 3000 K Warm White

8° orientabilità
adjustable

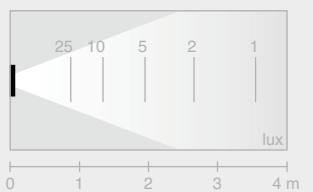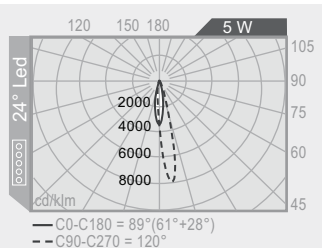

.85F.T



vetro trasparente clear diffuser
alimentatore elettronico electronic ballast

26 / 32 W TC-TE

Gx24q-3

flood

2400 lm

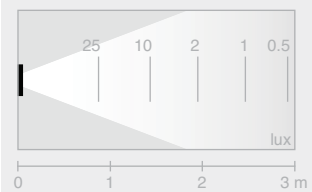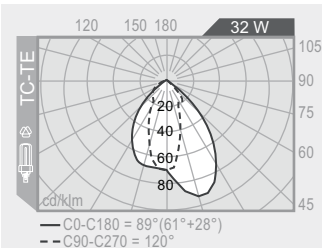

.L7X.T



vetro trasparente clear diffuser
alimentatore elettronico electronic ballast

35W HIT

G8,5

flood

3300 lm

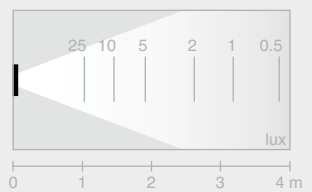

.L7X.T




vetro trasparente clear diffuser
alimentatore elettronico electronic ballast

35W HIT

G8,5

spot

3300 lm

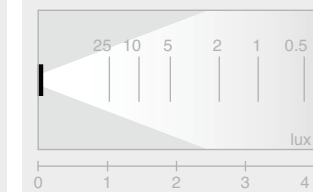


codice colori
colour codes

- .01** bianco
white
- .05** grigio antracite
anthracite grey
- .13** grigio RAL9006
RAL9006 Grey
- .45** marrone ruggine
rust brown


6535

1 fascio stretto 1 spot




6537

1 fascio largo 1 flood




6538

2 fasci larghi 2 flood



6539

1 fascio largo + 1 stretto
1 flood + 1 spot



finiture disponibili finishes available

bianco	grigio antracite	grigio RAL9006	marrone ruggine
white	anthracite grey	RAL9006 grey	rust brown

.59T.T

vetro trasparente clear diffuser
alimentatore elettronico electronic ballast



70W HIT-DE

Rx7s



spot

6500 lm

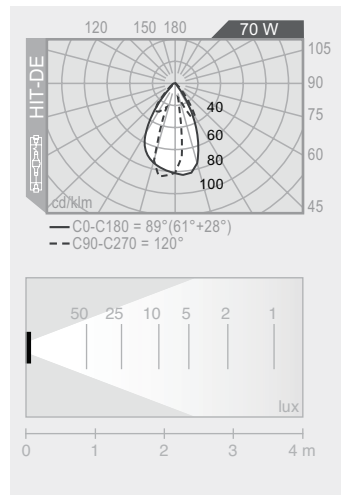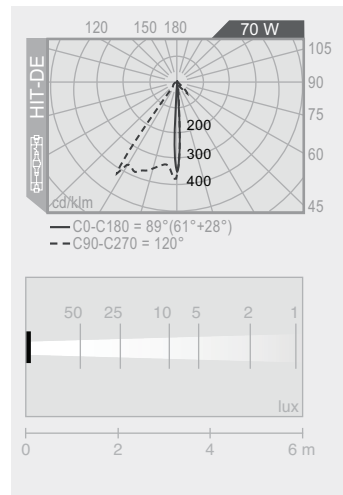

codice colori
colour codes

- .01** bianco
white
- .05** grigio antracite
anthracite grey
- .13** grigio RAL9006
RAL9006 Grey
- .45** marrone ruggine
rust brown

